



U.S. Department
of Transportation

Research and
Special Programs
Administration

400 Seventh Street S.W.
Washington D.C. 20590

DOT-E 11065 (EXTENSION)
ORIGINAL September 14, 1993

In accordance with 49 CFR 107.105 of the Department of Transportation (DOT) Hazardous Materials Regulations DOT-E 11065 is hereby extended for the party(ies) listed below by changing the expiration date in paragraph 10 to September 30, 1994. This change is effective from the issue date of this extension. All other terms of the exemption remain unchanged.

This extension applies only to party(ies) listed below based on the application(s) received in accordance with 49 CFR 107.105. This extension constitutes a necessary part of this exemption and must be attached to it.

for Alan I. Roberts
Alan I. Roberts
Associate Administrator
for Hazardous Materials Safety

NOV 30 1993

(DATE)

Dist: FRA

EXEMPTION HOLDER

APPLICATION DATE

City of Cincinnati/Department of Sewers
Cincinnati, OH

October 28, 1993

ADVISORY

IF YOU ARE A HOLDER OF AN EXEMPTION THAT AUTHORIZES THE USE OF A PACKAGING WITH A MAXIMUM CAPACITY LESS THAN 450 L (119 GALLONS) OR A MAXIMUM NET MASS LESS THAN 400 KG (882 POUNDS), PLEASE BE ADVISED THAT YOUR EXEMPTION MAY NOT BE RENEWED BEYOND SEPTEMBER 30, 1996. IN ADDITION, NO NEW CONSTRUCTION OF PACKAGINGS WHICH FALL WITHIN THE NON-BULK CAPACITIES LISTED ABOVE ARE AUTHORIZED AFTER SEPTEMBER 30, 1994. THIS IS CONSISTENT WITH THE IMPLEMENTATION OF THE NEW PACKAGING REQUIREMENTS ADOPTED UNDER DOCKET HM-181. ANY APPLICATION SUBMITTED TO THIS OFFICE TO RENEW AN EXEMPTION BEYOND THE SEPTEMBER 30, 1996 DATE WILL BE DENIED UNLESS THE APPLICATION CONTAINS SUPPORTING INFORMATION TO JUSTIFY THE CONTINUATION OF THE EXEMPTION.

SEP 14 1993



**U.S. Department of
Transportation**

Office of the Secretary
of Transportation

400 Seventh St., S.W.
Washington, D.C. 20590

DOT-E 11065

EXPIRATION DATE: January 1, 1994

(FOR RENEWAL, SEE 49 CFR SECTION 107.105.)

1. GRANTEE: City of Cincinnati, Department of Sewers,
Cincinnati, Ohio
2. PURPOSE AND LIMITATION: This exemption authorizes tank
cars, containing hazardous materials identified in paragraph
6, to remain standing with unloading connections attached
when no product is being transferred, provided that a
minimal level of monitoring, as specified in this exemption
is maintained, and provides no relief from any regulations
other than as specifically stated.
3. REGULATORY SYSTEM AFFECTED: 49 CFR Parts 106, 107 AND 171-
180.
4. REGULATIONS FROM WHICH EXEMPTED: 49 CFR 174.67 (i) and
(j).
5. BASIS. This exemption is based on City of Cincinnati's
application of June 28, 1993, submitted in accordance with
49 CFR 107.103, and the public proceeding thereon.
6. HAZARDOUS MATERIALS (49 CFR 172.101):

Hazardous materials description/proper shipping name	Hazard Class (Written Class) class number	Identification number	Packing Group
Chlorine	2.3	UN 1017	N/A

7. PACKAGING(S) and SAFETY CONTROL MEASURES:
 - a. PACKAGING - Packagings prescribed are DOT specification
tank cars authorized for the material specified meeting all
DOT specification requirements.
 - b. Any manually operated switch, under the proprietary
control of the exemption holder, providing access to the
track on which the equipment is located must be lined
against movement to that track and locked with an effective
locking device operable only by a representative of the
facility.

c. The facility operator shall install a bi-directional derail in an effective location (at least 50 feet when possible) from the end of the equipment to be protected by the caution sign. The person performing the unloading operation shall lock the device in the derailing position with an effective locking device operable only by a representative of the facility.

d. The facility operator shall designate an employee responsible for on-site monitoring of the transfer facility in the absence of the unloader. The designated employee must be made familiar with the nature and properties of the product contained in the tank car, procedures to be followed in the event of an emergency; and, in the event of an emergency, have the ability and authority to take responsive actions.

e. When a signalling system is used (including a monitoring system or a sensing device), the system must be capable of alerting the designated employee in the event of an emergency and providing immediate notification of any monitoring system malfunction. If the monitoring system does not have self-monitoring capability, the designated employee shall check the monitoring system hourly for proper operation. (For recommendations on the selection, installation and maintenance of signalling systems see NFPA 72 - Installation, Maintenance and Use of Protective Signalling Systems.)

f. In the absence of the unloader:

- (i) the tank car and facility shutoff valves must be secured in the closed position;
- (ii) no product may be transferred; and
- (iii) the requirements of 49 CFR 174.67(a)(2) and (3) apply.

g. The transfer facility shutoff valve shall be located as close as practicable to the point of connection between the transfer system and the tank car and in a manner that will minimize the release of product in the event of hose rupture or separation. The facility operator must take appropriate steps to prevent rupture of transfer hoses due to product expansion (i.e. liquid expansion chambers or hoses with an increased minimum burst pressure rating.)

8. SPECIAL PROVISIONS.

a. The facility operator shall have written safety procedures on file at each location that uses this exemption. The facility operator shall instruct each employee performing any function under this exemption on the contents of these procedures and ensure compliance with them. The written procedures must contain at least the following:

- (i) A physical description of the facility including the address and hours of operation.
- (ii) A drawing of the transfer facility showing natural and manmade barriers, locations of protective equipment (i.e. derail and caution sign), locations of emergency equipment and locations of signalling equipment.
- (iii) Procedures for monitoring the transfer facility [see paragraphs 7(a) and (b)].
- (iv) Information on the contents of the tank car including:
 - (a) chemical or common name of the product
 - (b) health and physical hazards involved in handling the product
 - (c) emergency and first aid procedures
- (v) Procedures for securing the transfer facility and protective equipment including derail, switch locks, tank car brakes, caution sign and wheel blocks.
- (vi) Equipment available for employee safety and procedures for using the equipment.
- (vii) Procedures and limitations for movement of tank cars in the vicinity of the transfer facility.
- (viii) Testing and maintenance of system components including signalling systems.
- (ix) Training requirements for designated employees responsible for monitoring the transfer facility.

Continuation of DOT-E 11065

Page 4

- (x) Procedural steps in the event of an emergency, including names and phone numbers of key personnel and public agencies to contact.
- (xi) Procedures for reviewing incidents to determine whether the written procedures require revision or modification to prevent future occurrences and amending those procedures when the review necessitates changes.

b. The facility operator must have on file, at each location using this exemption, a current copy of the Chlorine Institute Manual and the Chlorine Institute's Pamphlets 6, 57 and 66 for information on employee training and safety, emergency measures and recommended procedures for the installation of piping systems and emergency shut off facilities.

c. The facility operator must establish and maintain liaison with fire, police and other appropriate public officials to learn the responsibilities and resources of each governmental agency that may be called upon to respond to an emergency involving the tank car and transfer facility and acquaint the officials with the facility's capabilities and procedures in the event of an emergency.

d. MARKING - The marking requirements of Appendix B to Subpart B of Part 107 are waived.

9. MODES OF TRANSPORTATION AUTHORIZED. Rail freight.


10. MODAL REQUIREMENTS: None as a requirement of this exemption.

11. COMPLIANCE. Failure by a person to comply with any of the following may result in suspension or revocation of this exemption and penalties prescribed by the Hazardous Materials Transportation Act:

- All terms and conditions prescribed in this exemption and the Hazardous Materials Regulations, Parts 171-180.
- Any use or application of this exemption, including display of its number, when the exemption has expired or is otherwise no longer in effect unless a regulation has been amended making the exemption no longer necessary.
- Registration required by 49 CFR 107.601 et seq., when applicable.

12. REPORTING REQUIREMENTS. The carrier is required to report any incident involving loss of packaging contents or packaging failure to the Associate Administrator for Hazardous Materials Safety (AAHMS) as soon as practicable. (49 CFR 171.15 and 171.16 apply to any activity undertaken under the authority of this exemption.) In addition, the holder(s) of this exemption must also inform the AAHMS, in writing, as soon as practicable of any incidents involving the package and shipments made under this exemption.

Issued at Washington, D.C.:

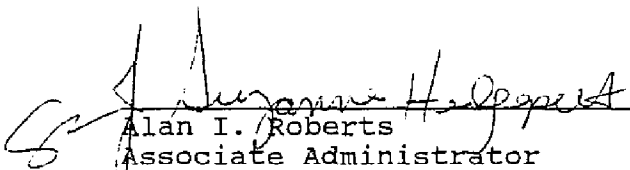

Alan I. Roberts
Associate Administrator
for Hazardous Materials Safety

SEP 14 1983

(DATE)

Address all inquiries to: Associate Administrator for Hazardous Materials Safety, Research and Special Programs Administration, Department of Transportation, Washington, D.C. 20590.
Attention: DHM-31.

The original of this exemption is on file at the above office. Photo reproductions and legible reductions of this exemption are permitted. Any alteration of this exemption is prohibited.

Dist: FRA